




Scoring sawblade KON/WZ

Application:
For scoring with feed.

Machine:
Panel sizing saws with scoring unit and pressure beam.

Workpiece material:
Chipboard and fibre materials paper and plastic coated, veneered, laminated veneer lumber (e.g. plywood, multiplex plywood), alu composite panels (z.B. Alucobond[®]).

Technical information:
Scoring depth 1.50 - 2.00 mm. Scoring sawblade has to be selected according to the cutting width of the main sawblade.

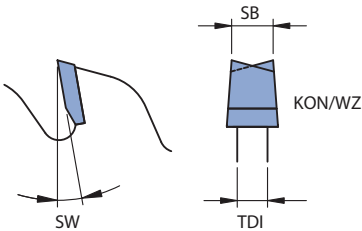

Scoring sawblade KON/WZ, HW design
WK 856 2 01, WK 856 2 05

Machine	D mm	SB mm	TDI mm	BO mm	NLA mm	Z	ZF	SW	n _{max} Deg. min ⁻¹	WSS ID
Panhans	125	3.2	2.5	20		24	KON/WZ 5		18300	165550 ●
	125	3.2	2.5	22		24	KON/WZ 5		18300	165551 ●
Giben, Homag, Mayer	125	4.4	3.5	45		24	KON/WZ 5		15200	165553 ●
Schelling	150	4.4	3.5	20		24	KON/WZ 5		15200	165554 ●
Felder, Mayer	150	4.4	3.5	30		36	KON/WZ 5		15200	165555 ●
Felder, Mayer	150	4.4	3.5	30		24	KON/WZ 5		15200	165556 ●
Homag	150	4.4	3.5	45		24	KON/WZ 5		15200	165557 ●
Homag	150	4.4	3.5	45		28	KON/WZ 5		14300	165558 ●
	160	3.2	2.5	20		32	KON/WZ 5		14300	165559 ●
Steton	160	4.4	3.5	30		36	KON/WZ 5		14300	165560 ●
Giben	160	4.4	3.5	45	3/11/70	36	KON/WZ 5		14300	165561 ●
Gabbiani	160	4.4	3.5	55	3/7/66	36	KON/WZ 5		12700	165562 ●
					3/6/84					
Höfer	180	3.2	2.5	20		36	KON/WZ 5		12700	165563 ●
	180	4.4	3.5	20		36	KON/WZ 5		12700	165564 ●
Homag	180	4.4	3.5	45		30	KON/WZ 5		12700	165565 ●
Anthon	180	4.4	3.5	45		36	KON/WZ 5		12700	165566 ●
Giben	180	4.5	3.2	50	3/13/80	36	KON/WZ 5		11400	165567 ●
Höfer,	200	4.4	3.5	20	2/11/66	24	KON/WZ 5		11400	165568 ●
Langzauner, Schelling										
Höfer,	200	4.4	3.5	20	2/11/66	36	KON/WZ 5		11400	165569 ●
Langzauner, Schelling										
	200	6.2	4.5	20	2/11/66	36	KON/WZ 5		11400	165570 ●
Scheer	200	3.2	2.5	30	2/10/60	60	KON/WZ 5		11400	165571 ●
Scheer	200	4.4	3.5	30	2/10/60	36	KON/WZ 5		11400	165572 ●
Schelling	200	4.8	3.5	20		36	KON/WZ 5		11400	165573 ●
Homag	200	4.4	3.5	45		36	KON/WZ 5		11400	165574 ●
Homag	200	5.8	4.6	45		36	KON/WZ 5		11400	165575 ●
Selco	200	4.4	3.5	65	2/9/100	36	KON/WZ 5		11400	165576 ●
					2/9/110					
Selco	200	4.8	3.5	65	2/9/100	36	KON/WZ 5		11400	165577 ●
					2/9/110					
Giben	215	4.4	3.5	50	3/15/80	42	KON/WZ 5		10600	165578 ●
					2/7/80					
Schelling	220	6.5	4.5	20	2/11/66	36	KON/WZ 5		10400	165579 ●
Homag	280	4.8	3.5	45		48	KON/WZ 5		8100	165580 ●
Homag	280	4.8	3.5	45		72	KON/WZ 5		8100	165581 ●
Schelling	300	4.4	3.5	30	2/11/73	48	KON/WZ 5		7600	165582 ●
Giben	300	4.4	3.5	50	3/15/80	48	KON/WZ 5		7600	165583 ●
Selco	300	4.4	3.5	65	2/9/100	72	KON/WZ 5		7600	165584 ●
					2/9/110					
Selco	300	4.4	3.5	65	3/15/80	48	KON/WZ 5		7600	165585 ●
					2/9/110					